




DOSTUPNO OD DECEMBRA 2018



Upravljanje aspiratorom

FCH63 GR



KARAKTERISTIKE

- Senzorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 3 indukcione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote

mm. 580x520 mm

Montažni otvor 560x490 mm

3 indukcione zone

Senzorsko upravljanje

110–265 mm

P Snaga (max) 4900 W




FCH63 GR

94.290 din.

INDUKCIONA PLOČA

ZONE ZA KUVANJE

| | | |
|----------------|--------------------------|-------|
| 1. Zona | 1400 W 1850 W Booster | Ø 175 |
| 2. Zona | 1400 W | Ø 175 |
| 3. Zona | 1850 W 2100 W Booster | Ø 215 |

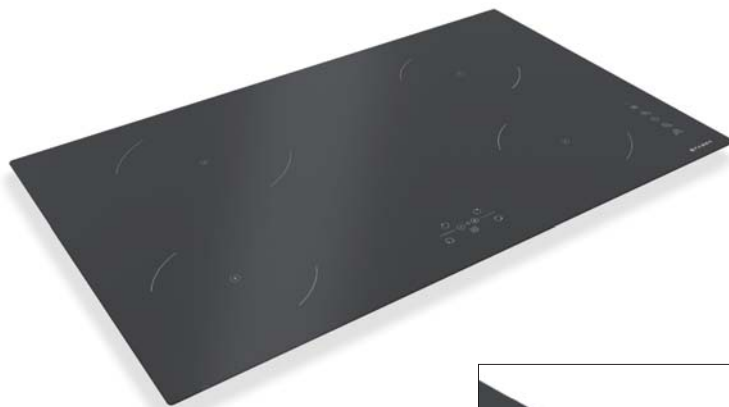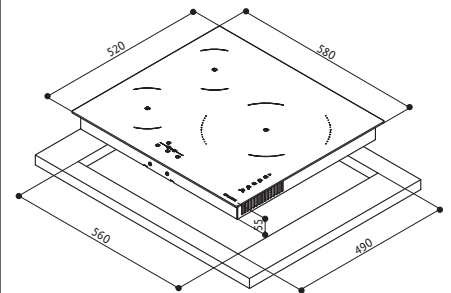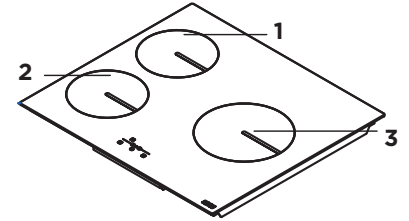


DOSTUPNO OD DECEMBRA 2018



Upravljanje aspiratorom

FCH84 GR



KARAKTERISTIKE

- Senzorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 4 indukcione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote

mm. 780x520 mm

Montažni otvor 750x490 mm

4 indukcione zone

Senzorsko upravljanje

110–265 mm

P Snaga (max) 7100 W

FCH84 GR

96.490 din.

INDUKCIONA PLOČA

ZONE ZA KUVANJE

| | | |
|----------------|--------------------------|-------|
| 1. Zona | 1200 W 1400 W Booster | Ø 175 |
| 2. Zona | 2300 W 3000 W Booster | Ø 215 |
| 3. Zona | 1400 W 2000 W Booster | Ø 175 |
| 4. Zona | 1400 W | Ø 175 |

