



## FBH84 BK



### KARAKTERISTIKE

- Sensorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 4 indukcione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote

mm. 780x520 mm

Montažni otvor  
750x490 mm

4 indukcione zone

Senzorsko  
upravljanje

110–265 mm

P  
(max)  
Snaga  
7100 W



### FBH84 BK

78.990 din.

INDUKCIONA PLOČA

#### ZONE ZA KUVANJE

<b>1. Zona</b>	1200 W 1400 W Booster	Ø 175
<b>2. Zona</b>	2300 W 3000 W Booster	Ø 215
<b>3. Zona</b>	1400 W 2000 W Booster	Ø 175
<b>4. Zona</b>	1400 W	Ø 175

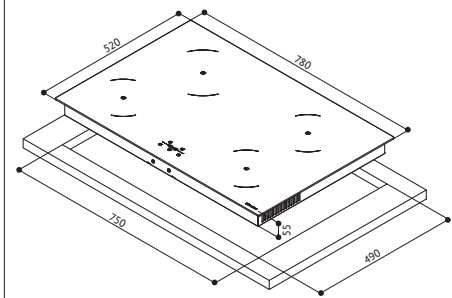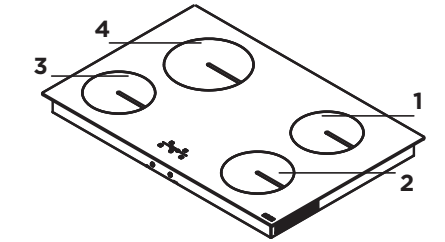

mm. 780x420 mm

Montažni otvor  
760x380 mm

3 indukcione zone

Senzorsko  
upravljanje

110–265 mm

P  
(max)  
Snaga  
6400 W



### FBH83 BK

76.290 din.

INDUKCIONA PLOČA

#### ZONE ZA KUVANJE

<b>1. Zona</b>	1400 W 2000 W Booster	Ø 175
<b>2. Zona</b>	1400 W	Ø 175
<b>3. Zona</b>	2300 W 3000 W Booster	Ø 215

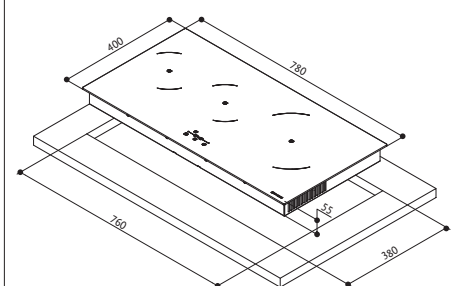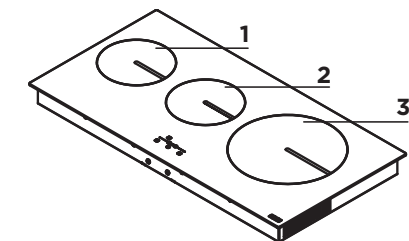

## FBH83 BK



### KARAKTERISTIKE

- Sensorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 3 indukcione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote