



FCH32 – može se kombinovati sa Hoo-B GLASS

## FCH32



### KARAKTERISTIKE

- Sensorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 2 indukzione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote

mm. 290x520 mm

Montažni otvor 270x500 mm

2 indukzione zone

Senzorsko upravljanje

110–225 mm

P (max) Snaga 3700 W



## FCH32

64.390 din.

INDUKCIONA PLOČA

### ZONE ZA KUVANJE

<b>1. Zona</b>	2300 W 3000 W Booster	Ø 200
<b>2. Zona</b>	1400 W	Ø 160

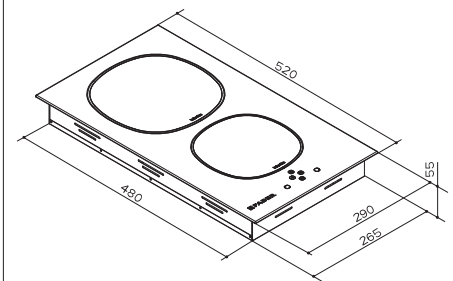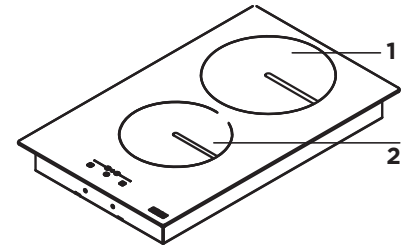

mm. 290x520 mm

Montažni otvor 270x500 mm

2 indukzione zone

Senzorsko upravljanje

110–225 mm

P (max) Snaga 3700 W



## FCH32 C

70.990 din.

INDUKCIONA PLOČA SA ALUMINIJUMSKIM OKVIROM

### ZONE ZA KUVANJE

<b>1. Zona</b>	2300 W 3000 W Booster	Ø 200
<b>2. Zona</b>	1400 W	Ø 160

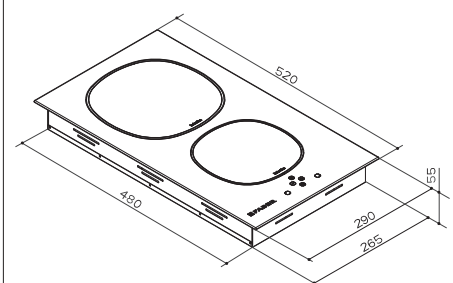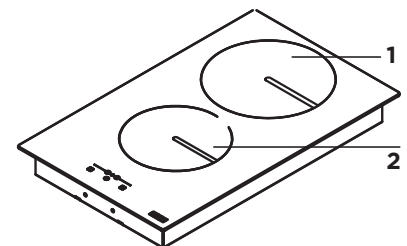

FCH32 C – može se kombinovati sa H00-B

## FCH32 C



### KARAKTERISTIKE

- Sensorsko upravljanje
- Container detection sistem
- Booster – ubrzano zagrevanje
- Tajmer do 99 minuta
- 2 indukzione zone
- 9 nivoa snage
- Bezbednosna funkcija automatskog isključivanja
- Indikator preostale toplote